


Battery Mini-Breakers


Metal Hybrid PPTC > MHP Series

Dimensions

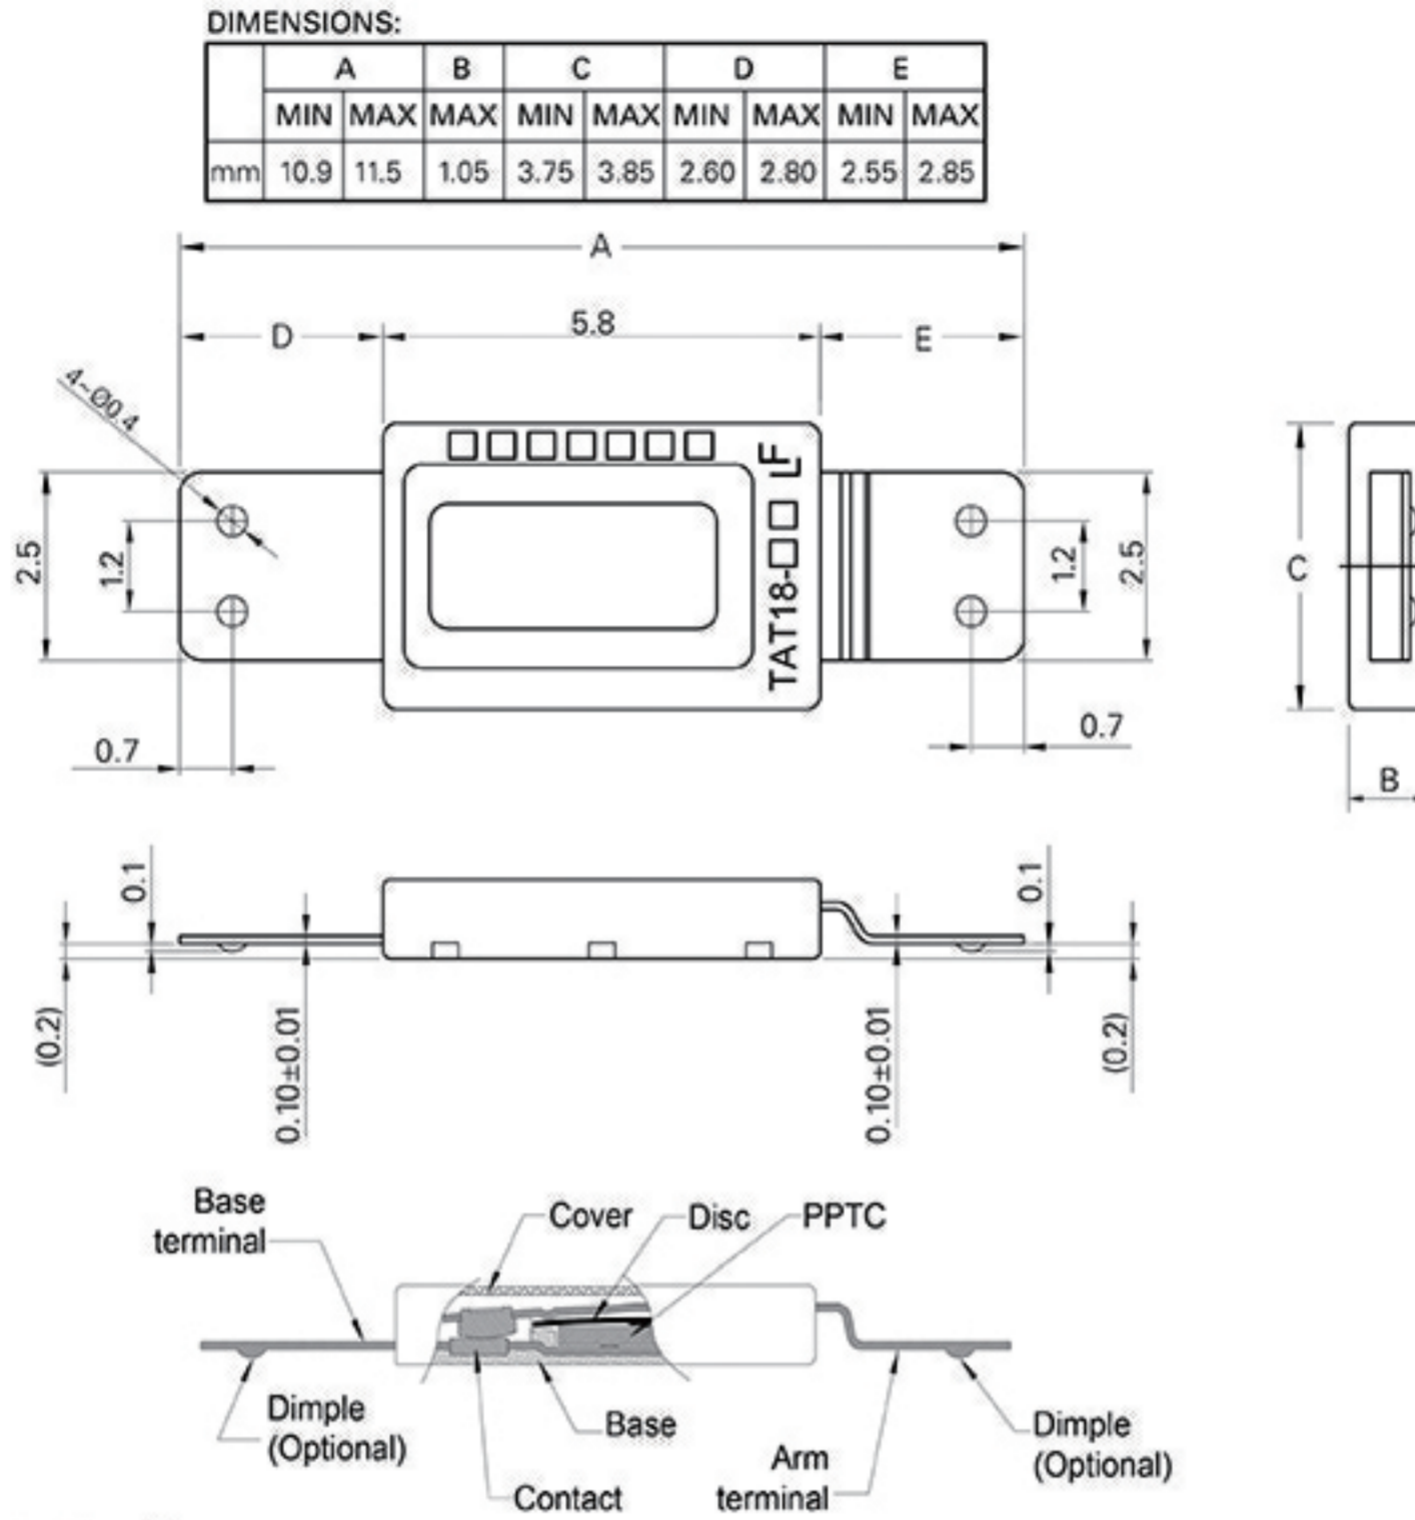

Notes:
 Unspecified dimensions, tolerance should be +/-0.1mm
 Dimensions in brackets are for reference

Current Vs. Temperature Curves

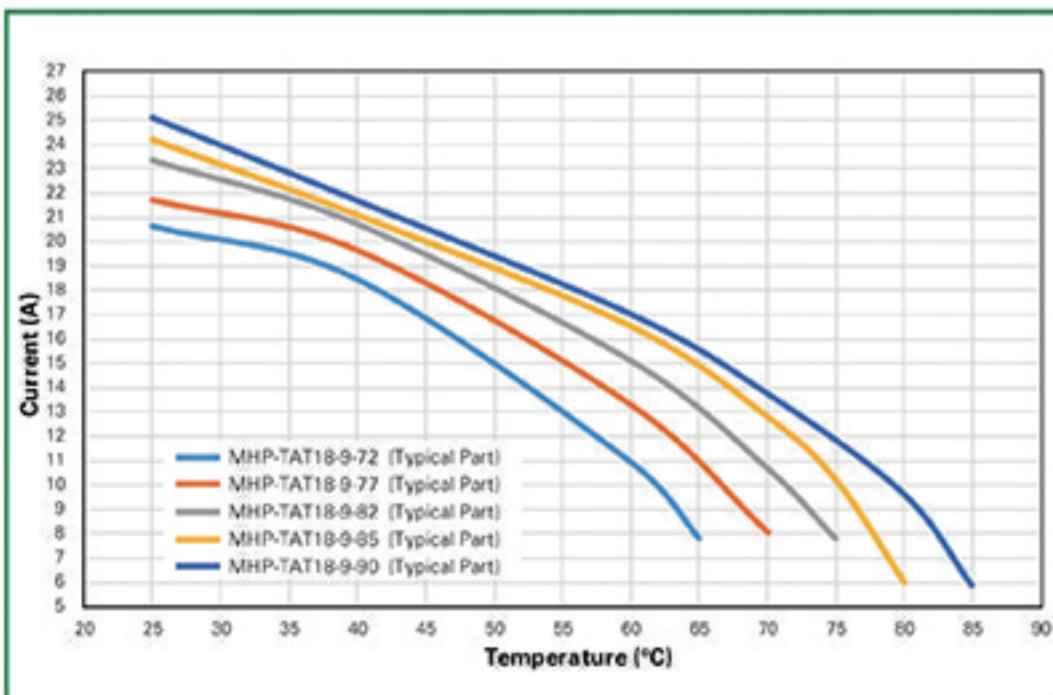

The current versus temperature curve was derived from placing test samples in an oven at 25°C, 40°C, 60°C, 70°C, and 75°C, increasing current flow through the sample at a rate of 0.1A/minute and recording the current value when the sample trips.

Part Marking System

